




# SOMMER

GARAGE DOOR OPERATOR

## aperto

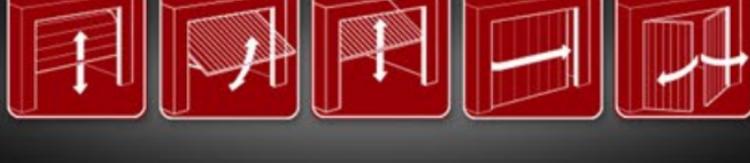

	Aperto 600	Aperto 800	Aperto 1000	Aperto 1300
Nennspannung	220 ...240 V/AC	220 ...240 V/AC	220 ...240 V/AC	220 ...240 V/AC
Nennfrequenz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Schutzklasse	IP 20	IP 20	IP 20	IP 20
max. Zug- und Druckkraft	600 N	800 N	1000 N	1300 N
Nennzugkraft	165 N	240 N	300 N	300 N
Nennstromaufnahme	0,7 A	0,8 A	0,9 A	0,9 A
Nennleistungsaufnahme	150 W	180 W	210 W	210 W
max. Geschwindigkeit	160 mm/s	150 mm/s	150 mm/s	130 mm/s
Leistung „Stand by“	7 W	2 W	2 W	2 W
Einschaltdauer	15 %	15 %	15 %	15 %



### PRODUCT DETAILS



### PRODUCT ADVANTAGES

- Operator system developed by SOMMER:
  - single-track tensioned chain
  - moving motor track carriage for longer service life
- SLS - Safety Lock System (the emergency release can be engaged and disengaged in every position of the door and provides security, for example, in the event of a power failure)
- Self-locking motor, thus more secure against break-ins, no additional locking mechanism required
- Very quiet opening and closing
- The operators are already pre-assembled and quickly installed, saves time and money
- Controlled soft run in ramp form without power loss